

Deckmaster System ID

Product Description Deckmaster System ID is a slip resistant traffic deck coating system.

Uses Deckmaster System ID can be applied to concrete, polymer modified cementitious screeds and asphalt substrates after survey and assessments have been carried out.
Deckmaster System ID is suitable for use on car park decks & ramps.
Deckmaster System ID imparts seamless protection to car park decks.

Standards compliance


Deckmaster System ID components have been tested as part of a system in accordance with BS EN 1504-2: Surface protection products as a coating for use as Ingress Protection (1.3) and Physical Resistance (5.1). See system product data sheet(s) for further information. Products and systems should be installed by competent persons in accordance with EN 1504-10 at +5⁰C and rising and +3⁰C above the dew point.

Characteristics

Deckmaster System ID provides:

- High bond strength adhesion
- High abrasion and wear resistance
- TRL slip PTV values wet >55 Class111
- Chemical resistant ISO 2812-1: 1995
- A range of UV stable standard colours

Deckmaster System ID

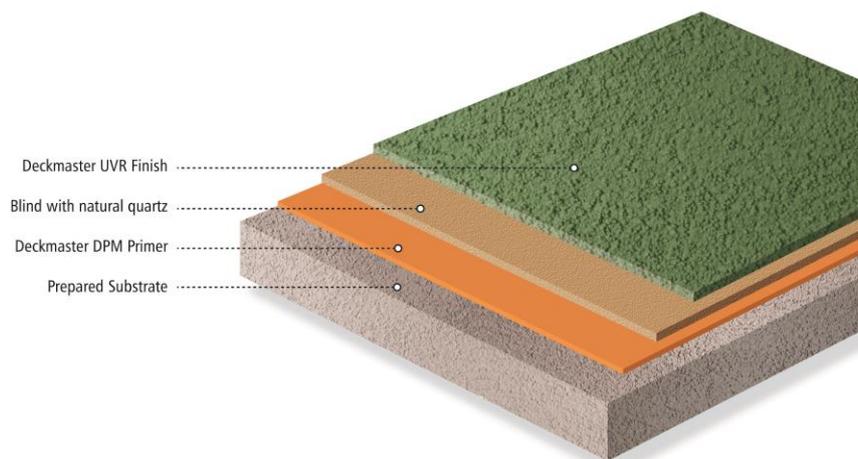

Deckmaster System ID	Product	Coverage
Primer	Deckmaster DPM Primer	0.3kg/m ²
Aggregate washed dried and graded	Quartz 0.3-0.6mm	2.0 kg/m ²
Sealer	Deckmaster UVR Finish	0.6 kg/m ²
Unit Sizes	10 kg 15kg & 20 kg units comprising resin and hardener	

Note. All asphalt substrates must be surveyed and assessed before specifications can be submitted.

Useable working life *	Temperature		Time
		10 °C	20 minutes
	20 °C	15 minutes	
	30 °C	< 10 minutes	

Over-coat time *	Temperature	Minimum	Maximum
	10 °C	24	36
20 °C	16	24	
30 °C	12	18	

* Times are approximate and can vary depending on site conditions including temperature and relative humidity.

Preparation of substrate

Inadequate preparation will lead to loss of adhesion and failure. Weak, damaged, and deteriorated concrete should be removed where necessary and repaired. The laitance and any surface sealer or curing membrane should be entirely removed by vacuum contained shot-blasting to expose the aggregate cleanly. High spots should be removed by grinding. The prepared substrate should be protected from further contamination prior to application.

Treatment of cracks and joints

Consideration should be given to the treatment of cracks etc. using appropriate methods such as surface banding of cracks, filling of cracks or transferring cracks into joints as specified in EN 1504-10.

Substrate quality

The surface strength of the base concrete should be tested after preparation, when the surface laitance has been removed. The concrete substrate should have a rebound hammer reading in accordance with BS EN 12504-2:2001, Type N of not less than 25 and a surface tensile strength of according to EN 1542 exceeding 1.5 N/mm². Once prepared, the substrate should be free from dust, loose material, surface contamination and materials which reduce bond or prevent suction or wetting by the product i.e., concrete curing agents. This should be carried out by vacuum. To avoid doubt, a test area should be applied, and the bond strength measured according to EN 1542.

Application conditions

General guidance	Application should not be carried out if precipitation is expected. Products should be stored before use so that their properties are not impaired.
Substrate & ambient temperature	5 – 30 °C
Substrate moisture content	Hygrometer readings up to 98% RH as measured in accordance with BS 8203 can be accommodated.
Dew point	The substrate and uncured floor must be at least 3 °C above the dew point to avoid condensation/blooming.

Application methods

Mixing	Add the specified hardener component to the appropriate resin component and mix using a low-speed electric mixer (300 - 400 rpm) for at least 3 minutes until homogeneous. Keep the mixing paddle fully submerged to avoid the entrapment of air and scrape the sides and bottom of the vessel several times.
Application	<ul style="list-style-type: none"> DPM Primer – Applied by Flat bladed squeegee and Pile roller typically and blinded with specified graded aggregate.

Pumaflor House, Ainleys Industrial Estate, Elland, West Yorkshire, HX5 9JP, England, Tel: +44 (0) 1422 379131 Fax: +44 (0) 1422 370943 info@deckmaster.co.uk www.deckmaster.co.uk



-
- UVR seal coat - Applied using same squeegee type and pile roller as the DPM primer layer
-

Cleaning of tools

Clean all tools with **Deckmaster Cleaning Solvent** immediately after use. Cured material can only be removed mechanically.

Over-coating

If continuity of application is prevented for over 24 hours, the edge should be mechanically abraded and/or solvent wiped. Allow the solvent to fully evaporate before proceeding. If applying to an aggregate blinded surface, ensure that the surface is completely dry before proceeding.

Care & maintenance

Good housekeeping will extend the service life of the car park deck. Cleaning should be carried out using a rotary scrubbing machine with a suitable cleaning agent using temperatures up to 50°C or by use of a medium pressure water jet. Frozen surfaces should be treated with a non-abrasive de-icing medium.

Storage & shelf life

12 months when stored off the ground in un-opened packs in a dry store, under cover between 10 °C and 30 °C out of direct sunlight. Protect from frost.

Limitations

Do not proceed with application if the surface temperature is <3 °C above the dew point. Application should not commence when the substrate temperature or the ambient temperature is or is anticipated to be <5 °C during the application period.

Legal notes

The information contained in this document, and all further technical advice given is based on our present knowledge and experience. However, it implies no liability or legal responsibility on our part. In particular, no warranty or guarantee of product performance in the legal sense is intended or implied as the conditions of use and the competence of any labour involved in the application are beyond our control. Properties listed are for guidance purposes only. We reserve the right to make any changes according to technological progress or further developments.

Revision date 21st June 2021
